

EUROPEAN PATENT OFFICE

Patent Abstracts of Japan

PUBLICATION NUMBER : 01235662
PUBLICATION DATE : 20-09-89


APPLICATION DATE : 16-03-88
APPLICATION NUMBER : 63060431

APPLICANT : HITACHI KOKI CO LTD;

INVENTOR : KOJIMA RYOJI;

INT.CL. : B41J 3/18 B41J 3/16

TITLE : RECORDING ELECTRODE AND
MANUFACTURE THEREOF

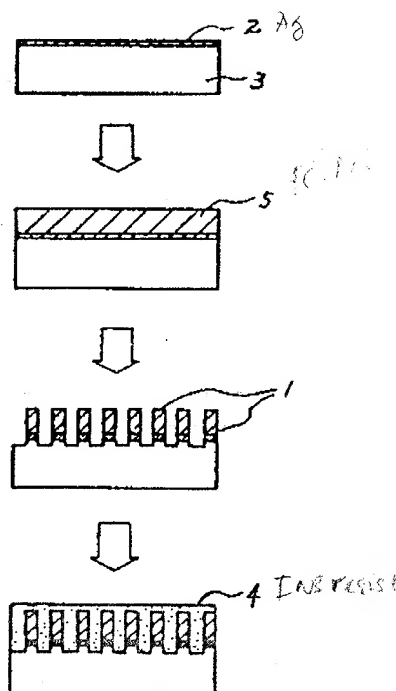


ABSTRACT : PURPOSE: To achieve high density, high resolution, high reliability, and improvement of productivity, by a method wherein a linear column state pattern is formed by using a conductive magnetic material of a specific thickness or above, and an insulating resist is applied to the electrode pattern and between the electrode patterns.


CONSTITUTION: A junction layer 2 of a silver solder layer of $5\mu\text{m}$ in thickness is formed by a screen process printing on a side surface of an insulating alumina substrate 3. Then, a Fe-Ni alloy sheet of $40\mu\text{m}$ or above in thickness as a conductive magnetic sheet 5 is lined on the junction layer 2, and the alumina substrate and the Fe-Ni alloy sheet are joined by heating. Thereafter, linear cutting is performed by a cut depth of $125\mu\text{m}$ to form an electrode pattern 1. Since an area where an edge part of the electrode pattern is brought into contact with toner is increased, a formed image becomes extremely clear. Successively a space between the electrode patterns 1 is filled and the electrode pattern 1 is coated with polyimide resin as an insulating resist 4. No short circuit between the electrodes via the toner occurs, and a clear image is formed.

COPYRIGHT: (C) JPO


第 1 図

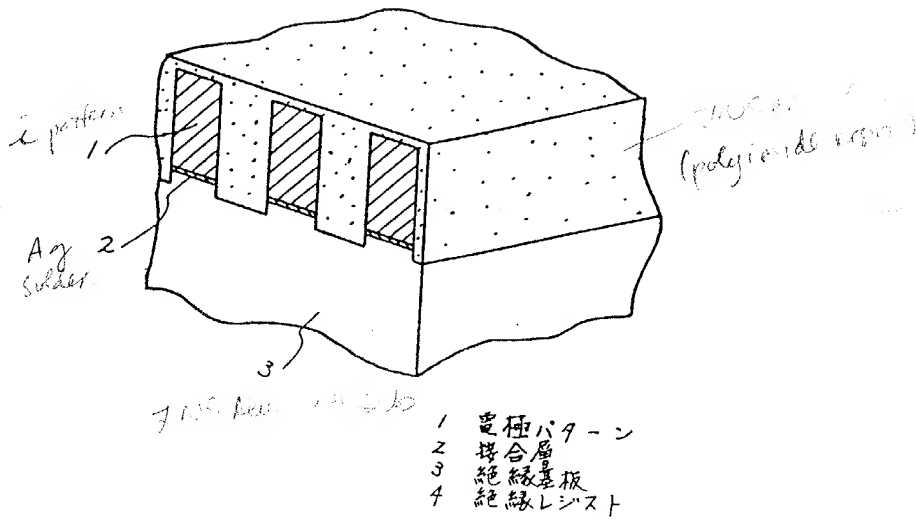


第 2 図

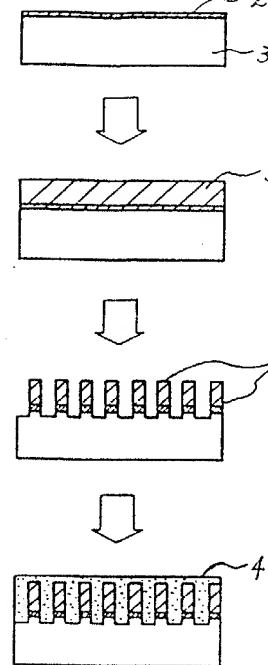

第 3 図

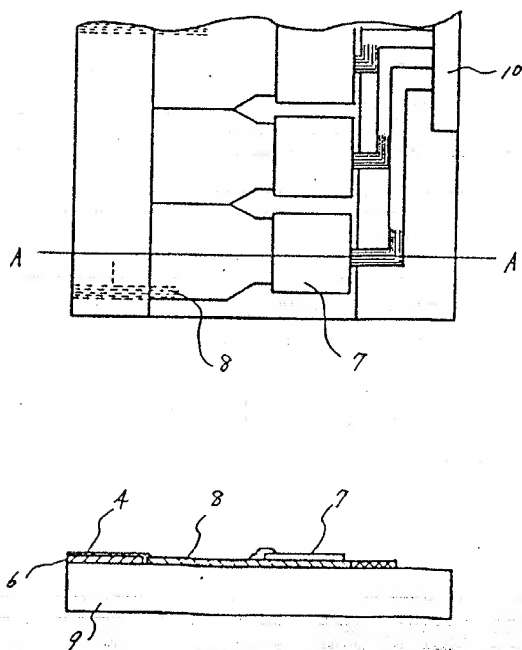

第 4 図

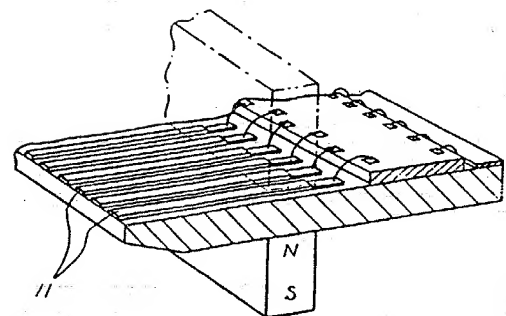

第 5 図

